


STANDARD DRIVEWAY DETAILS



DRIVEWAY CONNECTION TO UNCURBED SWALE ROADWAY

| MINIMUM PAVEMENT SPECIFICATION IN TOWN R/W | | | |
|--------------------------------------------|----------------------------|--------------------------------------|------------------------------|
| MATERIAL | SURFACE | BASE COURSE | SUBGRADE |
| CONCRETE: | 6" THICK (3,000 PSI) MIN. | N/A | 12" THICK @ 98% AASHTO T-180 |
| ASPHALT: | 1.5" THICK SP-9.5 OR S-III | 6" THICK (LBR100) @ 98% AASHTO T-180 | 12" THICK @ 98% AASHTO T-180 |

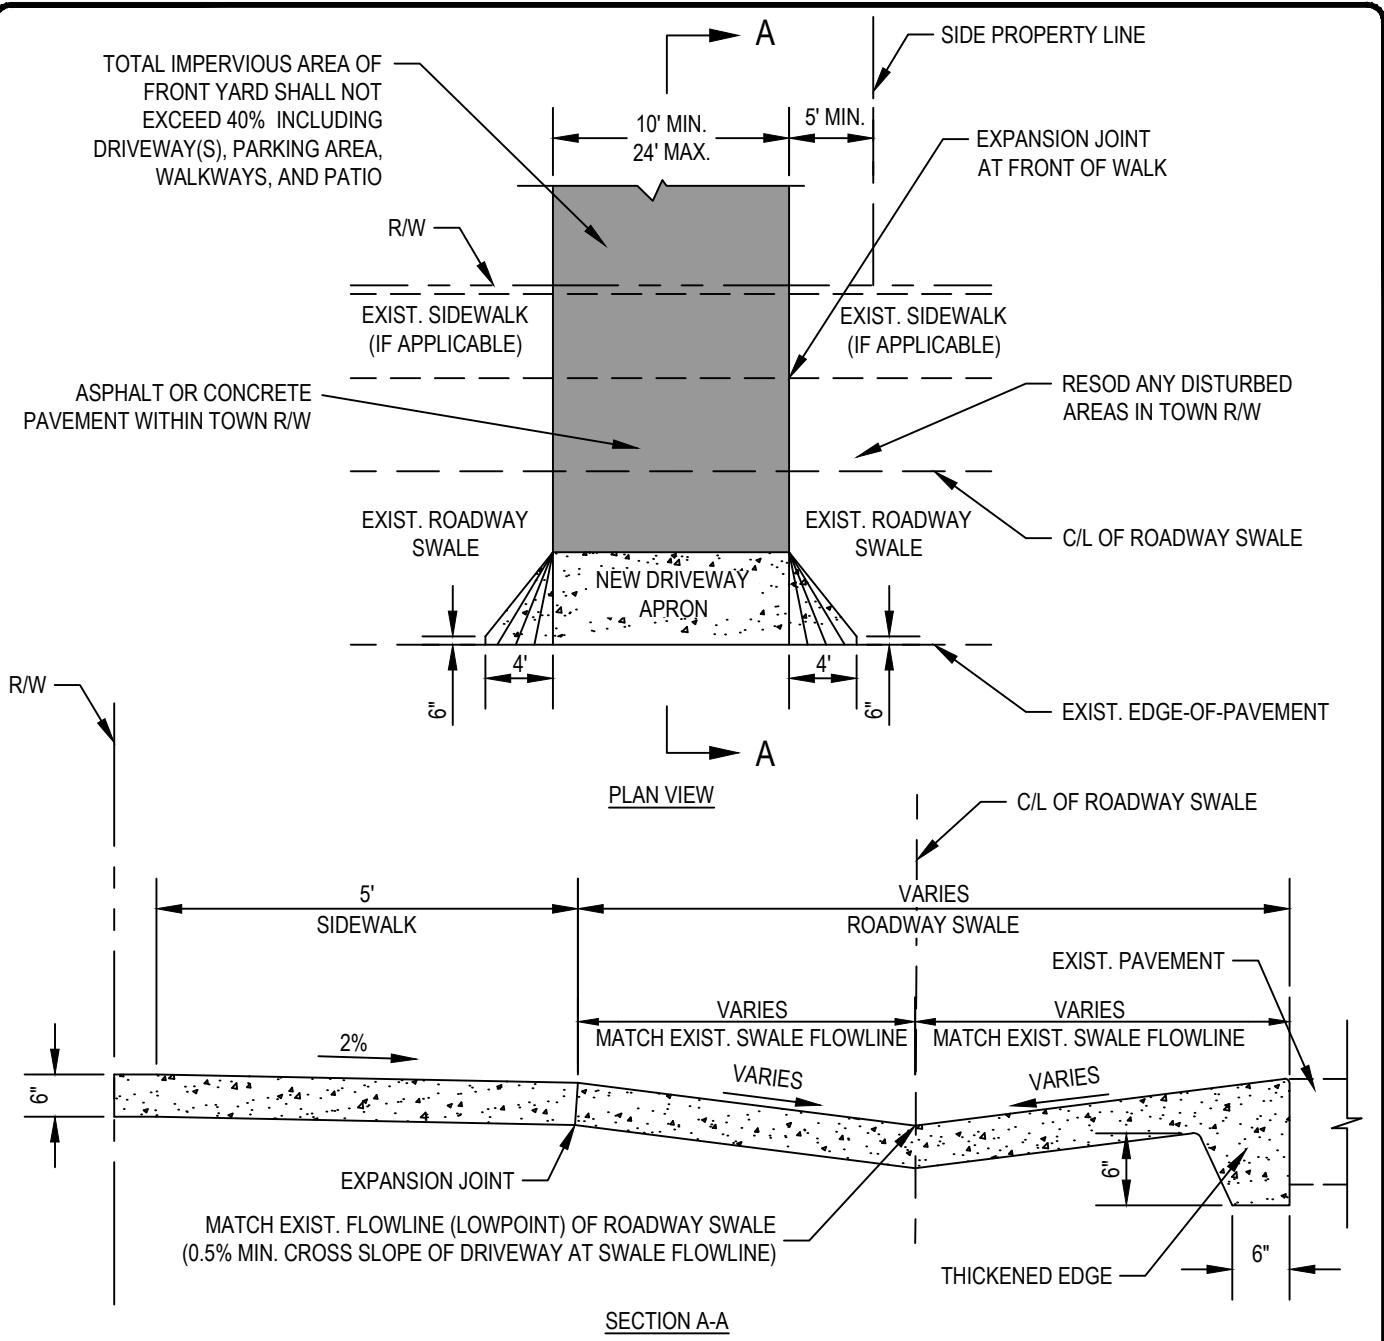

TOWN OF HAVERHILL
ENGINEERING STANDARDS

RESIDENTIAL DRIVEWAY: SWALE

DETAIL NO.
02
ISSUED: 06/05/2024